




TECHNICAL DATA SHEET

BOPET FILM
Metallized Corona
APB-PMZ

APB-PMZ

Key Features

- Excellent Metal Adhesion and Luster
- Excellent Dimensional Stability
- Excellent Gloss
- Excellent barrier properties

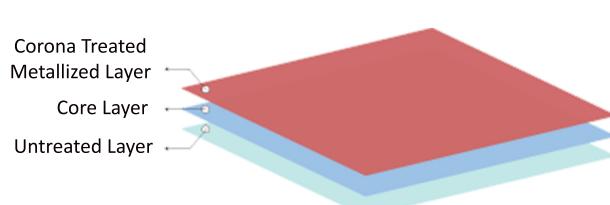

Is a metallized co-extruded BOPET film, with one side corona treated and other side untreated

Application
Printing and Lamination

PROPERTIES		TEST METHOD (ASTM)	UNIT	TYPICAL VALUE						
THICKNESS	Internal		Micron	10	11	12	19	23	36	50
DEVIATION OF AVG. FILM THICKNESS			%	±1.5	±1.5	±1.5	±1.5	±1.5	±1.5	±1.5
FILM DENSITY	D-1505	gm/cc		1.4	1.4	1.4	1.4	1.4	1.4	1.4
GRAMMAGE	Internal	gm/m ²		14	15.4	16.8	26.6	32.2	50.4	70
YIELD	Internal	m ² /kg		71.43	64.94	59.52	37.59	31.06	19.84	14.29
TREATMENT LEVEL*	D-2578	dyne/cm		52	52	52	52	52	52	52
COEFF OF FRICTION	DYNAMIC	D-1894	-	0.5 ± 0.02	0.5 ± 0.02	0.5 ± 0.02	0.5 ± 0.02	0.5 ± 0.02	0.5 ± 0.02	0.5 ± 0.02
OPTICAL DENSITY	Internal	%		2.2	2.2	2.2	2.2	2.2	2.2	2.2
TENSILE STRENGTH AT BREAK	MD*		Kg/cm ²	1,900	2,100	2,250	2,250	2,250	2,000	2,000
	TD*			2,000	2,200	2,450	2,450	2,450	2,400	2,400
	MD*		(Psi)	27,000	29,900	32,000	32,000	32,000	28,400	28,400
	TD*			28,500	31,300	34,850	34,850	34,850	34,100	34,100
ELONGATION AT BREAK	MD*		%	120	125	150	155	155	160	165
	TD*			88	100	120	120	120	120	120
HEAT SHRINKAGE (AT 130°C AND 15 MIN)	MD*		%	1 - 1.5	1 - 1.5	1 - 1.5	1 - 1.5	1 - 1.5	1 - 1.5	1 - 1.5
	TD*			0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	0.5
W.V.T.R (38°C & 90% RH)		F-1249	gm/m ² /day	1.00	1.00	1.00	1.00	1.00	0.80	0.60
			(gm/100in ² /day)	0.06	0.06	0.06	0.06	0.06	0.05	0.04
O.T.R (23°C & 0% RH)		D-3985	cc/m ² /day	1.30	1.30	1.30	1.10	1.10	1.00	0.80
			(cc/100in ² /day)	0.08	0.08	0.08	0.07	0.07	0.06	0.05

*MD = Machine Direction *TD = Transverse Direction

Reel Packing Format

Core Size	Outer Reel Dia
3" (76 mm)	< 550 mm
6" (152 mm)	< 650 mm

Min Reel Size	Max Reel Size
400 mm	2200 mm

Storage

It is recommended to store the film below 30°C in order to avoid deterioration of film properties. It is advisable to use the material on FIFO basis.

Food Contact

Complies with FDA and EC regulations. MSDS are available on request.

Disclaimer

Information contained here is best to our knowledge but limited to the information as specified. No representation or warranty is made regarding the information or its fitness to a particular use. The user is solely responsible for all determinations regarding use and we disclaim liability for any loss or damage that may occur from the use of this information. Astro films reserves the right to change the technical data sheet at any time for enhancing the Quality of the products without prior information.